



# OCLEA CV25 $\mu$ SOM PRODUCT BRIEF

## Overview

The Oclea™ CV25 System on Module (uSoM) combines the Ambarella™ CV25 SoC, DRAM, FLASH, and key peripherals together in a single package enabling the next generation of computer vision applications in precision agriculture, smart security, retail, and automotive markets.

The integrated CV25 processor combines image processing, 5Mp30 video encoding, and CVflow™ computer vision processing into a single, low-powered design enabling products that operate ‘on the edge’ of the network and requires no external on-premise or cloud data processing. Therefore, operating costs are lowered, and the reduced latency is an advantage for products requiring real-time decision making.

Teknique’s flexible SDK\* provides a Linux-based framework and an environment based on GStreamer and includes pre-defined demonstration applications that allow your software team to start immediate development.

The Oclea™ software platform also includes integrations with leading CNN/DNN frameworks, 3rd party analytics, and cloud service providers, and provides a rich set of APIs that enable a range of product customization options.

\* The SDK is available with purchase of the Oclea™ Breakout EVK - please refer to the Oclea™ Breakout EVK product brief for more detail.

## Key Features

### Powerful Multi-Format Video Processing

5Mp30 + 720p30 + 5Mp1 video encoding performance provides high quality video with efficient H.264 and H.265 encoding.

### Computer Vision Engine

Built in hardware acceleration for CNN and DNN networks using CVFlow™ processing with the Oclea™ SoM for detection, classification, tracking, and more.


### Ultra Low Power

Combining the CV25 SoC’s advanced 10 nm fabrication process with Teknique’s highly optimized board design provides a very low power platform for your next generation product.

### Advanced Image Processing

Electronic image stabilization, HDR, hardware de-warping engine support, and 2D/3D Noise correction for excellent low-light image quality.

Size	32 x 32 x 3.9 mm
Weight	8 g

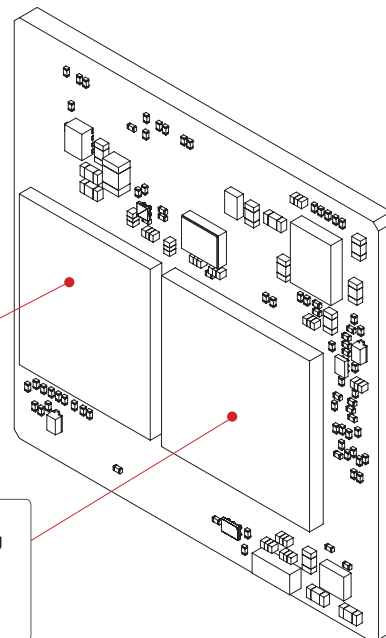

- 8GB eMMC MCP Flash Storage
- 2GB LPDDR4-3600 SDRAM

- Quad-core ARM® Cortex® -A53 1 GHz CPU
- Image Processing DSP and Video Encoding
- CVflow™ Computer Vision AI Engine

■ The Teknique Oclea™ CV25  $\mu$ SoM



### General Specifications

#### MAIN COMPONENTS

##### Ambarella™ CV25 SoC

- Quad-core ARM® Cortex®-A53 1 GHz CPU
- Image Processing DSP and Video Encoding DSP
- CVflow™ Computer Vision AI Engine

##### Memory and Storage

- 8GB eMMC MCP Flash
- 2GB LPDDR4 1800 MHz DRAM
- SDIO Interface Available To Main Board

#### INPUT/OUTPUT INTERFACES

##### Rich Video Sensor Interface

- Primary Sensor Input
  - up to 8 Lane SLVS/MIPI
  - 8 bit parallel LVDS
- Secondary Sensor Input
  - up to 4 Lane SLVS/MIPI
- Third Sensor Input
  - up to 2 Lane SLVS/MIPI
- Multi-VIN is shared between 8 lanes
- Maximum Input Rate - 400 MPixels/s

##### USB 2.0 Host/Device

##### HDMI 2.0 and MIPI-DSI Interfaces

##### Gigabit Ethernet

##### Many Additional Peripherals

- UART, I2C, GPIO, I2S, PWM, etc

#### POWER CONSUMPTION AND SDK

##### Lab measured power consumption

- 1080p input with H.265 encoding < 1W


##### Mature and Highly Programmable Software Development Kit (SDK)

- Linux Version 4.14+
- Gstreamer framework with sample demo applications in full source
- Includes integrations with leading CNN/DNN frameworks and 3rd party analytics
- Mature and extendable REST API for cloud service integration
- Rich set of APIs that enable a wide range of product customizations

### A NOTE ON SENSOR SUPPORT

Please check with your Sales Representative regarding Image Sensor options and Video Input support. New sensors or video input support may require NRE or custom engineering services.

The Teknique Oclea™ CV25 μSoM Block Diagram

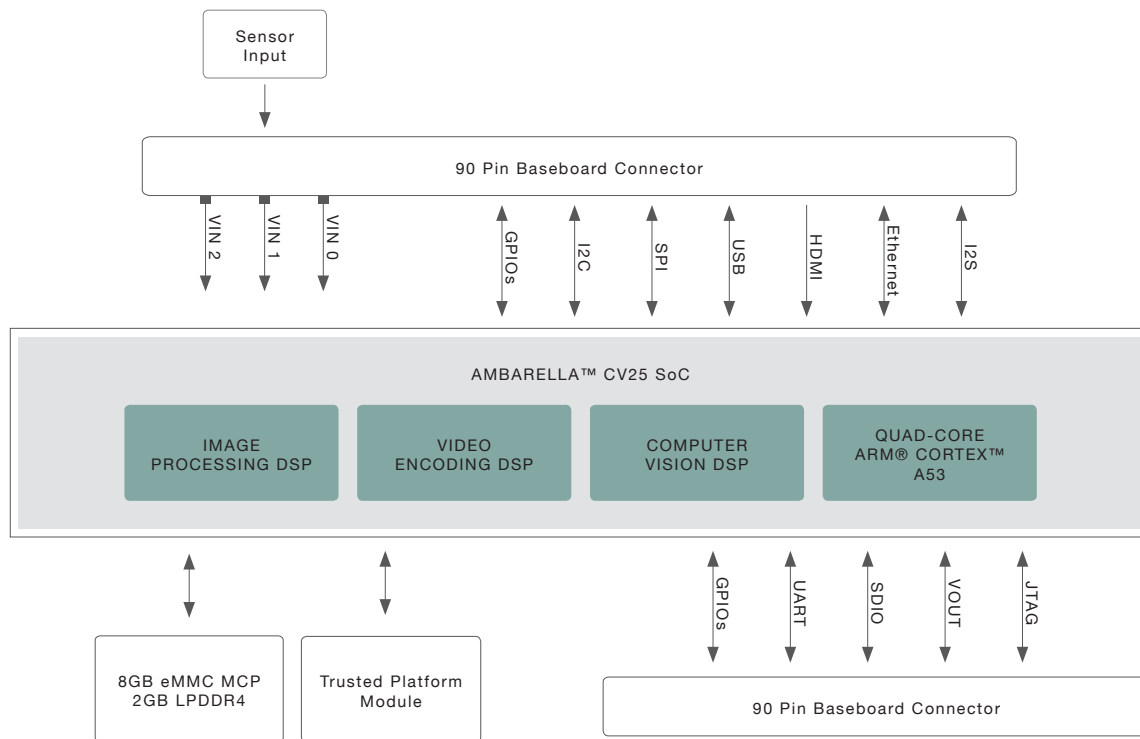

### +CONTACT

Website : [www.oclea.com](http://www.oclea.com)

General Enquiries : [enquiries-us@oclea.com](mailto:enquiries-us@oclea.com)

Copyright Teknique Ltd. All rights reserved. Teknique, Oclea, the Oclea logo and the Teknique logo are trademarks of Teknique Ltd. All other brands, product names and company names are trademarks of their respective owners. The information in this document is believed to be reliable, but may project preliminary functionality not yet available. Teknique Ltd. makes no guarantee or warranty concerning the accuracy and availability of said information and shall not be responsible for any loss or damage whatever nature resulting from the use of, or reliance upon it. Teknique Ltd. does not guarantee that the use of any information contained herein will not infringe upon patent, trademark, copyright, or other rights of third parties. Teknique Ltd. reserves the right to make changes in the product and/or its specifications presented in this publication at any time without notice.