


# Mustang-M2AE-MX1

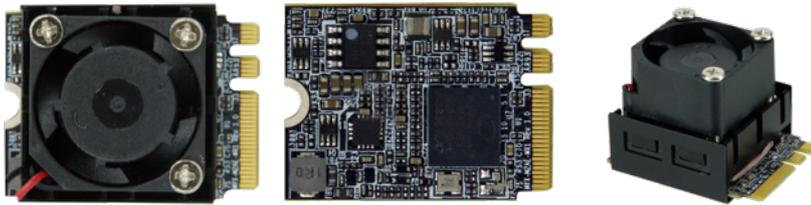

## Feature

- M.2 AE key form factor (22 x 30 mm)
- 1 x Intel® Movidius™ Myriad™ X VPU MA2485
- Power efficiency, approximate 4.5W
- Operating Temperature -20°C to 60°C
- Powered by Intel's OpenVINO™ toolkit

intel  
MOVIDIUS

## Introduction

The Mustang-M2AE-MX1M.2 AE-key card included one Intel® Movidius™ Myriad™ X VPU, providing an flexible AI inference solution for compact size and embedded systems.

VPU is short for vision processing unit. It can run AI faster, and is well suited for low power consumption applications such as surveillance, retail, transportation. With the advantage of power efficiency and high performance to dedicate DNN topologies, it is perfect to be implemented in AI edge computing device to reduce total power usage, providing longer duty time for the rechargeable edge computing equipment.


## Key Features of Intel® Movidius™ Myriad™ X VPU:

- Native FP16 support
- Rapidly port and deploy neural networks in Caffe and Tensorflow formats
- End-to-End acceleration for many common deep neural networks
- Industry-leading Inferences/S/Watt performance


## Specifications

Model Name	Mustang-M2AE-MX1
Main Chip	1 x Intel® Movidius™ Myriad™ X MA2485 VPU
Operating Systems	Ubuntu 18.04.x 16.04.x LTS 64bit, CentOS 7.4 64bit, Windows® 10 64bit
Dataplane Interface	M.2 AE Key
Power Consumption	Approximate 4.5W
Operating Temperature	-20°C to 60°C
Cooling	Active Heatsink
Dimensions	22 x 30 mm
Operating Humidity	5% ~ 90%
Support Topology	AlexNet, GoogleNetV1/V2, MobileNet SSD, MobileNetV1/V2, MTCNN, Squeezenet1.0/1.1, Tiny Yolo V1 & V2, Yolo V2, ResNet-18/50/101 * For more topologies support information please refer to Intel® OpenVINO™ Toolkit official website. [Supported Models] <a href="https://docs.openvino toolkit.org/latest/_docs_IE_DG_Introduction.html#SupportedFW">https://docs.openvino toolkit.org/latest/_docs_IE_DG_Introduction.html#SupportedFW</a> [Supported Framework Layers] <a href="https://docs.openvino toolkit.org/latest/_docs_MO_DG_prepare_model_Supported_Frameworks_Layers.html">https://docs.openvino toolkit.org/latest/_docs_MO_DG_prepare_model_Supported_Frameworks_Layers.html</a>

## 10X Higher Performance

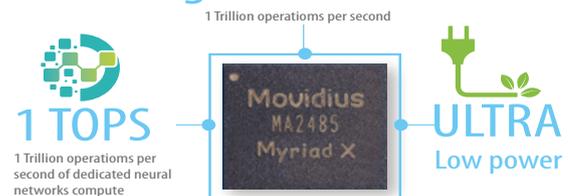

## Dimensions (Unit: mm)

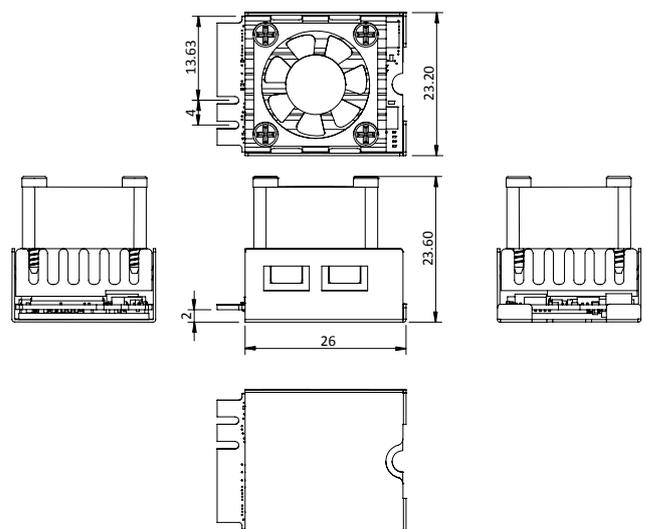

## Ordering Information

Part No.	Description
Mustang-M2AE-MX1-R10	Computing Accelerator Card with 1 x Intel® Movidius™ Myriad™ X MA2485 VPU, M.2 AE key interface, 2230, RoHS